

## **ALL-INCLUSIVE**




### **T-LOFT 532**



### **T-LOFT 582**






- **140 HP POWER UNIT**
- **IRON GREY CAB**
- **BLACK GRILLE + HEADLIGHTS AND SKID PLATE**

**70**°

- **16" ALLOY WHEEL RIMS**
- **TRACTION +**
- 2 DIN RADIO + STEERING WHEEL CONTRO
- CAB BLIND
- **REAR CAMERA**
- **REAR LED LIGHTS** SOLAR PANEL
- EXTERNAL TV SOCKET/12 V/220 V
- **EXTERNAL GAS SOCKET**
- 220 V F-BIKF SOCKFT
- FLYSCREEN AND CENTRAL LOCKIN
- WINTER PACK





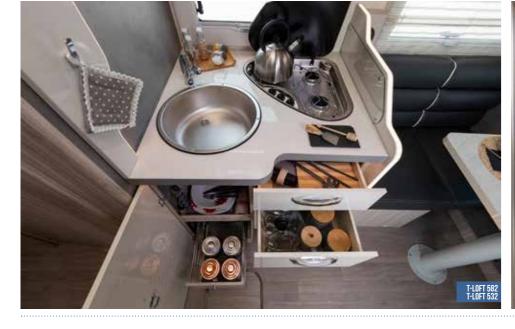







launches the Anniversary series

elnagh







## **ALL-INCLUSIVE**



# **TOP OF THE CLASS EQUIPMENT**

• 140 HP POWER UNIT

**TRACTION +** 

CAB BLIND **REAR CAMERA** 

**REAR LED LIGHTS** 

**EXTERNAL GAS SOCKET** 

EXTERNAL TV SOCKET/12 V/220 V

FLYSCREEN AND CENTRAL LOCKING

SOLAR PANEL

WINTER PACK

**16" ALLOY WHEEL RIMS** 

#### **MAGNUM 532**



#### **MAGNUM 582**

















Floor hatch



MODEL	WEIGHT Kg	T-LOFT 532	T-LOFT 582	MAGNUM 532	MAGNUM 582
MECHANICAL UNIT	- KU	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
ENGINE, POWER HP	•	2,3 MJ - 140 CV	2,3 MJ - 140 CV	2,3 MJ - 140 CV	2,3 MJ - 140 CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)		3500	3500	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS MIN / MAX (KG)	•	3000/3160	3015/3160	3025 / 3160	3025/3160
PAY LOAD MIN / MAX (KG)	•	340 / 500	340 / 485	340/475	340/475
WHEELBASE (MM) MAXIMUM TOWABLE WEIGHT (KG)	•	4035 2000	4035 2000	4035 2000	4035 2000
WHEELS DIMENSIONS	•	16"	16"	16"	16"
MANUAL AIR CONDITIONING		S	S	S	S
DRIVER AND PASSENGER AIRBAG		S	S	S	S
CRUISE CONTROL WITH SPEED LIMITER	•	S	S	S	S
ABS / ESC/ TRACTION +	-/-/1	S/S/S	\$/\$/\$	S/S/S	\$/\$/\$
SWIVELLING DRIVER' AND PASSENGER'S SEAT	•	S	S	S	S
CAB SEAT COVERS	•	S	S		
AUTOMATIC GEAR	33	0	0	0	0
PAINTED CAB	•	S	S		
PAINTED FRONT BUMPER		S	S		•
DRL (DAY RUNNIG LIGHT) / ANTIFOG LIGHTS	0,5/2	0/0	0/0	-/-	-/-
2 DIN RADIO / BLUETOOTH RADIO / STEERING WHEEL RADIO CONTROLS DIMENSIONS AND PLACES	2/3/1	S/0/S	\$/0/\$	\$/0/\$	\$/0/\$
EXTERNAL LENGHT (MM) / EXTERNAL WIDTH (MM)		7410/2350	7410/2350	7420 / 2350	7420 / 2350
EXTERNAL HEIGHT(MM) / INTERNAL HEIGHT (MM)		2950/2080	2950/2080	2950 / 2080	2950/ 2080
CAPACITÀ MAX SERBATOI: ACQUE CHIARE, ACQUE GRIGIE (L**)	•	4	4	4	4
BERTHS (OPTIONAL DINETTE)	•	4 (-)*	4 (-)	4 (-)*	4 (-)
AUXILIARY BED IN DINETTE	5	•	-	•	•
REAR BED (CM)	•	200x79 / 200x79 - 200x190	188X148	200x79/200x79-200x190	188X148
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	•		-	-	-
OVERCAB BED (CM) / ELEVATING BED (CM)	•	- / 190x123 (103)	- / 190x123 (103)	- / 187x134	- / 187x134
ADDITIONAL SEAT REAR BED	•	S	•	S	
LOCKER (USEFUL OPENING, CM)	•	115x95/115x95	115x95 / 115x95	115x95 / 115x95	115x95 / 115x95
MAX. INTERNAL GARAGE HEIGHT (CM)	•	121	116	121	116
FLOOR / WALLS / ROOF THICKNESS (MM) FLOOR / WALLS / ROOF MATERIAL (MM)	•	54 / 31 / 31 VTR / VTR / VTR	54 / 31 / 31 VTR / VTR / VTR	54 / 31 / 31 VTR / VTR / VTR	54 / 31 / 31 VTR / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF		S	S	S	S
INSTALLATIONS	•	3	3	5	5
BURNERS / GAS OVEN / SUCTION HOOD	- / 14 / -	3/0/5	3/0/5	3/0/5	3/0/5
TANK CAPACITY : CLEAR WATER / WASTEWATER (L**)	•	20 (100) / 135	20 (100) / 135	20 (100) / 135	20 (100) / 135
AUTOMATIC TRIVALENT FRIDGE ( 220V, 12V, GAS ) (L)	•	149	149	149	149
COMPRESSOR FRIDGE (L)				-	-
STANDARD HEATING SYSTEM	•	Combi 4 Diesel	Combi 4 Diesel	Combi 4 Diesel	Combi 4 Diesel
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	•	2x15	2x15	2x15	2x15
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	•	S	S	S	S
SHOWER TRAY WITH DOUBLE DRAIN	-	\$/0	S/0	s/0	\$/0
INTEGRATED AND ISOLATED ENTRY STEP HEATED GARAGE LOCKER	- / 4	\$70 \$	S	S S S S S S S S S S S S S S S S S S S	S/0
SKYLIGHT	•	5	5	5	5
PANORAMIC ROOF	•	S	S		
REAR SKYLIGHT (MM)		400x400 (S) / 960x655 (O)	400x400 (S) / 960x655 (O)	400x400 (S) / 960x655 (O)	400x400 (S) / 960x655 (O)
CENTRAL SKYLIGHT (MM)					
DINETTE SKYLIGHT (MM)	· ·	400x400	400x400	400x400	400x400
	•	400x400	400x400		400x400 700x500 (S) / 960X655 (O)
SKYLIGHT TOILETTE/SHOWER (MM)		•	• •	400x400 700x500 (S) / 960X655 (O)	700x500 (S) / 960X655 (O)
SKYLIGHTTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN		- - 0	- - 0	400x400 700x500 (S) / 960X655 (O) - O	700x500 (S) / 960X655 (O) - O
SKYLIGHT TOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET		•	• •	400x400 700x500 (S) / 960X655 (O)	700x500 (S) / 960X655 (O)
SKYLIGHTTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS	1	- - 0 S	- - 0 S	400x400 700x500 (S) / 960X655 (O) - O S	700x500 (S) / 960X655 (O) - O S
SKYLIGHTTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND	- - 1 - 6/-	- 0 5 5/-	- 0 5 5/-	400x400 700x500 (S) / 60X655 (O) - O S S / -	700x500 (S) / 960X655 (O) - O S S
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET	- - 1 - - 6/- -/10	0 5 5/- 5/0	- 0 5 5/- 5/0	400x400 700x500 (S) / %0X655 (O) 0 S S S / - S / 0	700x500 (S) / 960X655 (O) 0 S S S / . S / 0
SKYLIGHT TOLETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN	- - 1 - 6/-	- 0 5 5/-	- 0 5 5/- 5/0 5	400x400 700x500 (S) / 60X655 (O) - O S S / -	700x500 (S) / 960X655 (O) - O S S
SKYLIGHTTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BUND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CAR'ET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT	- - 1 - - 6/- -/10	- 0 5 5/- 5/0 5	- 0 5 5/- 5/0 5 5	400x400 700x500 (S) / 960X655 (O) 0 S S / - S / 0 - -	700x500 (S) / 960X655 (O) - - - - - - - - - - - - -
SKYLIGHT TOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES	- - - - - - - - - - - - - - - - - - -	0 5 5/- 5/0 5 5	- 0 5 5/- 5/0 5	400x400 700x500 (S) / 960X655 (O)         	700x500 (S) / 960X655 (O) - - - - - - - - - - - - -
SKYLIGHTTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BUND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CAR'ET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT	- - - - - - - - - - - - - - - - - - -	- 0 5 5/- 5/0 5	- 0 5 5/- 5/0 5 5 5	400x400 700x500 (S) / 960X655 (O) 0 S S / - S / 0 - -	700x500 (S) / 960X655 (O) - - - - - - - - - - - - -
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELLING LCD HOIDER INTERNAL LED LIGHDERR INTERNAL LED LIGHDERR INTERNAL LED LIGHDER EXTERIORS	· 1 · ·/10 2,5 · · ·	0 5 5/- 5/0 5 5 5 5 5 5	- 0 5 5/- 5/0 5 5 5 5 5 5 5	400x400 700x500 (S) / 960X655 (O) 	700x500 (S) / 960X655 (O)
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELLING LCD HOLDER INTERNAL LED LIGHTENING EXTERIORS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR	· 1 · ·/10 2,5 · · · ·	0 5 5/- 5/0 5 - 5 5	- - 0 5 - 	400x400 700x500 (S) / 960X655 (O)  - 0 S         	700x500 (S) / 960X655 (O) - 0 S - - - - - - - - - - - - -
SKYLIGHT TOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLZZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELLING ELD HOLDER INTERNAL LED LIGHTENING EXTERIORS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PAREL (FITTED) WITH REGULATOR	· 1 · ·/10 2,5 · · ·	0 5 5/- 5/0 5 5 5 5 5 5	- 0 5 5/- 5/0 5 5 5 5 5 5 5	400x400 700x500 (S) / 960X655 (O) 	700x500 (S) / 960X655 (O)
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIPELLING LCD HOIDER INTERNAL LED LIGHTENING EXTERIORS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PANEL (FITTED) WITH REGULATOR ENTRANCE DOOR WITH FIXED WINDOW	· 1 · ·/10 2,5 · · · ·	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	- - 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5	400x400 700x500 (S) / %60X655 (O) 	700x500 (S) / 960X655 (O)
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PIEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELLING LCD HOLDER INTERNAL LED LIGHTENING EXTERIODS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PANEL (FITTED) WITH REGULATOR ENTRANCE DOOR WITH FIXED WINDOW ENTRANCE DOOR	1	0 5 5/- 5/0 5 5 5 5 5	- - 0 5 - 	400x400 700x500 (S) / 960X655 (O) - - - - - - - - - - - - - - - - - - -	700x500 (S) / 960X655 (O) - 0 S - - - - - - - - - - - - -
SKYLIGHT TOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLZ2D WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR RED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELING LCD HOLDER INTERNAL LED LIGHTENING EXTERIONS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PANEL (FITTED) WITH REGULATOR ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	· 1 · ·/10 2,5 · · · ·	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	400x400 700x500 (S) / 960X655 (O) 	700x500 (S) / 960X655 (O) 
SKYLIGHTOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR BED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIPELLING LCD HOLDER INTERNAL LED LIGHTENING EXTERNOR REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PANEL (FITTED) WITH REGULATOR ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS XL ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	1 ./10 2,5	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	- - 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5	400x400 700x500 (S) / %60X655 (O) 	700x500 (S) / 960X655 (O)
SKYLIGHT TOILETTE/SHOWER (MM) 400X400 SKYLIGHT (MM) WITH FAN DOUBLE-GLZ2D WINDOWS WITH BLIND MOSQUITO NET EQUIPMENTS PLEATED CAB BLIND / THERMAL BLIND CAB / BODY CARPET CAB SEPARATION CURTAIN REAR RED HEIGHT ADJUSTMENT BEDS WITH STAVES SWIVELING LCD HOLDER INTERNAL LED LIGHTENING EXTERIONS REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR SOLAR PANEL (FITTED) WITH REGULATOR ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	1 ./10 2,5	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	- 0 5 5/- 5/0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	400x400 700x500 (S) / 960X655 (O) 	700x500 (S) / 960X655 (O) 

\* The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory. \*\*To increase the vehicle payload, when travelling it is possible to reduce the fresh water tank capacity to approx. 20 lt.

The masses indicated in this catalogue refer to the provisions of European Directive 2007/46/EC.

**MASS IN RUNNING ORDER** It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the access

sories installed.

PAYLOAD This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (dri-ver excluded), and the personal effects. The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional bag-gage. All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC. Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight, the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.

NOTES ELNAGH reserves itself the right to change the characteristics and the furnishings of all its models with no ad-vance notice required; all data contained in this leaflet must therefore be considered approximate and non-binding. Despite thorough checks of the contents, we cannot exclude possible printing and/or translating errors. This catalogue does not constitute contractual documentation.

For the above reasons, all information relating to the specifications and equipment of each model must be requested prior to purchase from the dealer, who, as the sole contact person, will confirm or correct the data published by updating the customer on the characteristics and actual equipment of the relevant vehicle being negotiated. Any reproduction, including in part, of the test or of the content of this document is prohibited.

The indicated weights are exclusively approximated. Tolerances of +/-5 % are allowed. Generally speaking, special equipment and options increase the no-load weight and entail a reduction in the payload.

We hereby decline any and all responsibility in case structural changes are made to the vehicle; any assembly, disas-sembly or changes carried out by unauthorised workshops may jeopardise your safety and cause the warranty clau-ses to be forfeited. For additional information on installation and technical details, please contact one of our dealers.

*elnagh* 

The ELNAGH world at the click of a button. On www.elnagh.com every product detail, model photos, sales network. All the innovations in real time, special initiatives, limited offers and much more.

Connect from your PC, tablet or smartphone and discover the ELNAGH web world!



🕨 YouTube www.elnagh.com